

PROSOCO 10-2008

# ATTENTION!

These blocks are made with natural aggregates and are sold as is. They have passed inspection and meet the specifications required. Usage of this product constitutes acceptance. If you have any questions regarding this product, please contact the manufacturer immediately.

*Some color variation between blocks is normal and any variation should be distributed evenly through the wall when laying block.*

**WARNING: DO NOT CLEAN BLOCK WITH MURIATIC ACID!**  
 Use a cleaner and weatherproofer made specifically for this block and follow the manufacturer's recommendations!



## CLEANING

► **SURE-KLEAN** ◄

Light Duty Concrete Cleaner

*For best overall appearance and color uniformity*

from  
**PROSOCO**  
 SINCE 1939

Pressure rinse with 400 to 800 psi at a water flow rate of 6 to 8 gallons per minute and a 30° fan spray tip. Apply appropriate PROSOCO cleaner with a pump up sprayer not to exceed 50 psi. Reduce water pressure to avoid damage to delicate masonry.




**Westbrook  
 Concrete  
 Block Co., Inc.**

For more information regarding cleaning and sealing instructions please call

860.399.6201

[www.westbrookblock.com](http://www.westbrookblock.com)

# Manufacturer's recommendations

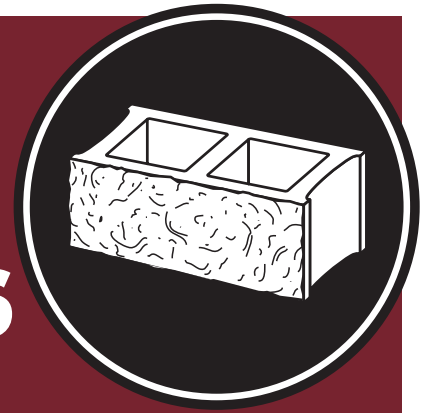

## Post-construction cleandown



### CLEANING

#### ►SURE-KLEAN®

#### Light Duty Concrete Cleaner

#### **For best overall appearance and color uniformity**

- Improves color uniformity and enhances appearance.
- Removes mortar smears and embedded stains.
- Designed for colored concrete.
- Designed for use with pressure water rinsing.
- Improves bond of color coatings.
- Improves penetration of protective treatments.

from  
**PROSOCO**  
SINCE 1939

Laboratory testing has identified the above products as most effective on and compatible with the concrete block listed in this catalog. For free copies of the test results, product literature or other information related to the care of this block, contact PROSOCO Customer Care toll-free at (800) 255-4255. Or visit PROSOCO's website at [www.prosoco.com](http://www.prosoco.com).

Light Duty Concrete Cleaner **should be applied with a pump up sprayer not to exceed 50 psi.**



**Westbrook  
Concrete  
Block Co., Inc.**

For more information regarding cleaning and sealing instructions please call

860.399.6201

[www.westbrookblock.com](http://www.westbrookblock.com)